




NORMAL SHOULDER SECTION

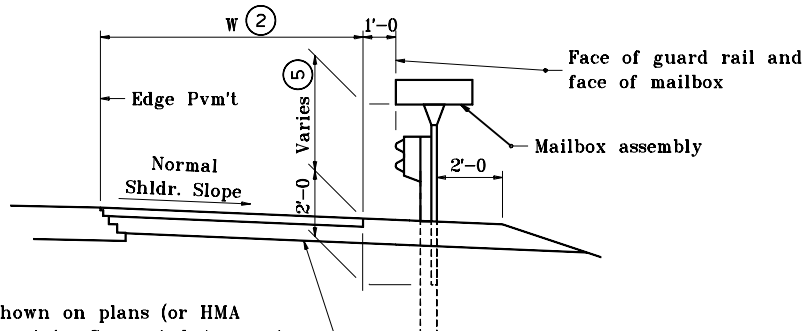

SHOULDER SECTION WITH GUARD RAIL

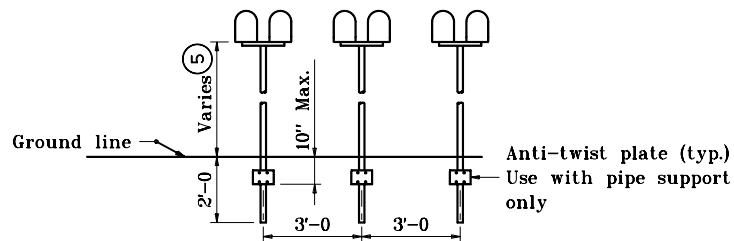

SPACING FOR MULTIPLE POST INSTALLATION

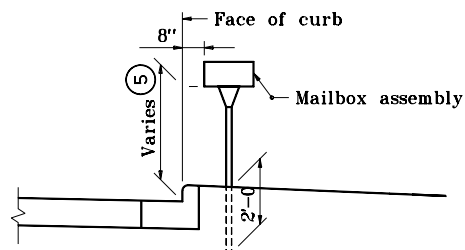

CURBED SECTION

GENERAL NOTES


- ② W = Minimum width of mailbox approach at mailbox.
W = 8 ft Minimum for 20 years projected A.D.T. less than 1500.
W = 10 ft Minimum for 20 year projected A.D.T. equal to or greater than 1500.
3. The low speed-low traffic mailbox approach and combination approach and drive will be permitted only on local and collector roads with a design speed of 40 mph or less and with a 20 year projected A.D.T. of fewer than 400 V.P.D.
- ⑤ The normal height range is 3'-6 to 4'-0. Contact the local postmaster to establish appropriate installation height

INDIANA DEPARTMENT OF TRANSPORTATION

ELEVATION VIEWS

JANUARY 2000

STANDARD DRAWING NO. **E 611-MBAS-04**



/s/ Anthony L. Uremovich 9-01-97
DESIGN STANDARDS ENGINEER DATE

/s/ Donald W. Lucas 9-01-97
CHIEF HIGHWAY ENGINEER DATE